

WEILAND INFITTING HINGED TRACK DOOR

Customer & PO#




W.I.C.

DOOR NO. DOOR QUANTITY DOOR SIZE: H.I.C.

TOP-OF-RAIL

SWING: LEFT HAND (SHOWN) RIGHT HAND (MIRROR IMAGE)

SEPERATE 120 VOLT
POWER SUPPLY
FREEZER DOORS

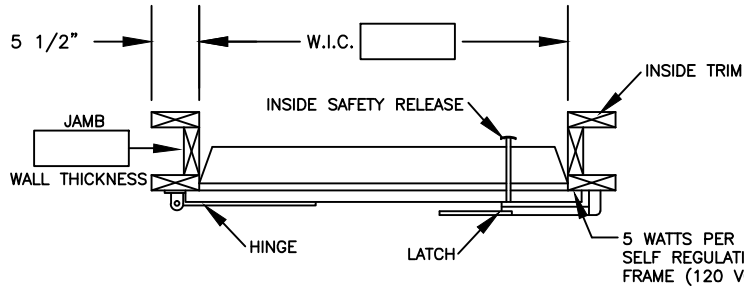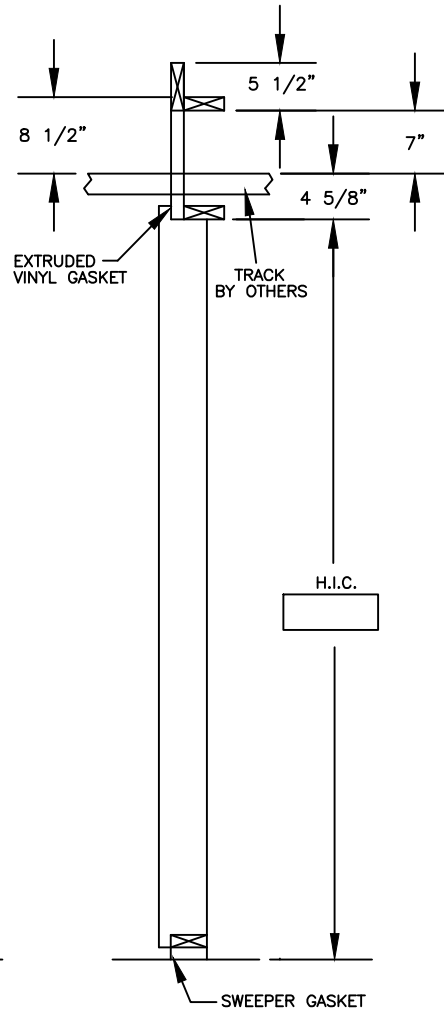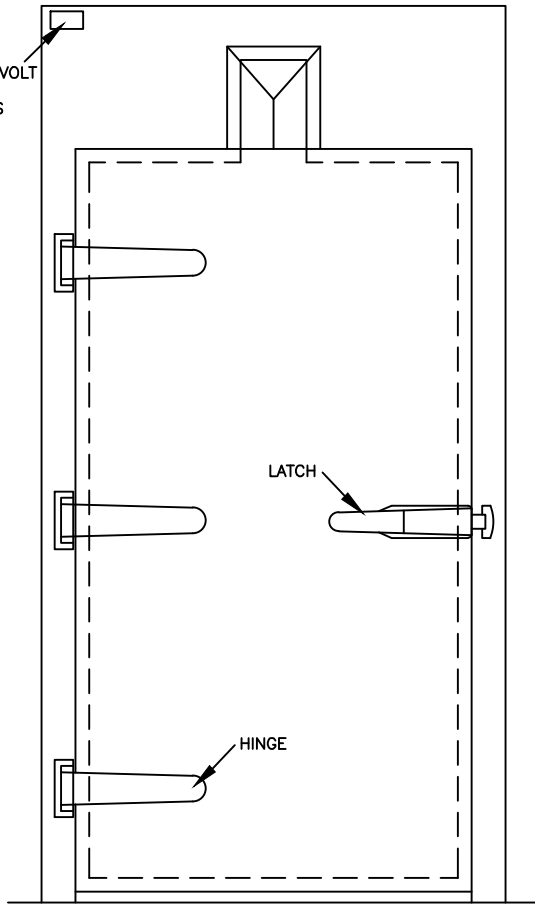


BUCK OPENING WITH JAMBS
W.I.C. + 4"
H.I.C. + 2"

BUCK OPENING WITHOUT JAMBS
W.I.C. + 0"
H.I.C. + 0"

1. DOOR PANEL: F.I.P. POLYURETHANE INSULATION CORE
 - 3" Thick Door
 - 4" Thick Door
 - 5" Thick Door
 - 6" Thick Door
- COOLER FREEZER INDUSTRIAL
2. DOOR
 - MOLDED FIBERGLASS (WHITE)
 - WHITE STUCCO EMBOSSED GALV.
 - MILL FINISH GALV.
 - STAINLESS STEEL
3. DOOR CASEMENTS
 - WHITE STUCCO EMBOSSED GALV.
 - MILL FIN. GALV.
 - STAINLESS STEEL
4. DOOR TRIM
 - GALVANIZED STEEL
 - STAINLESS STEEL
5. OPTIONS
 - HEATER CABLE-FREEZER DOOR (4 SIDES)
 - JAMBS
 - JAMB DEPTH _____
 - INSIDE TRIM (1 1/2" X 5 1/2" STD.)
 - SILL OPTION 1 (HIGH SILL)
 - SILL OPTION 2 (THRESHOLD WITH SWEEP)
 - KICK PLATE
 - GALVANIZED STEEL STAINLESS STEEL
 - STD. HEIGHT 12" 18" 24" 36"
 - ONE SIDE TWO SIDES
 - LOCKING DEVICE
 - VISION PANEL (1/2" INSULATED GLASS)
 - (1/2" POLYCARBONATE)
 - SIZE 12" X 18" HEATED
 - HYDRAULIC CLOSER
 - SPRING TENSION BARREL CLOSER
 - PANIC BAR WITH EXTERIOR ACCESS
 - PANIC BAR WITHOUT EXTERIOR ACCESS
 - U.S.D.A. APPROVAL

CHANGES, REMARKS, ETC. _____

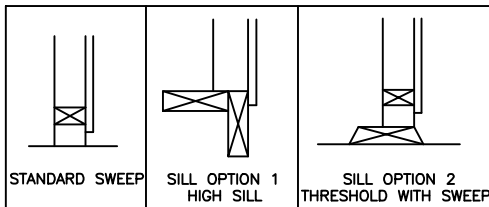

WEILAND INFITTING HINGED DOORS include door panel, casings covered with 26 ga. metal in any of several coverings which include mill finished galvanized steel, aluminum, or stainless steel, F.I.P. polyurethane insulation core, vinyl gaskets, hinges and latch have corrosion resistant coatings, all exposed seams sealed, padlock provided with safety release, 120 volt self regulating heater cable in freezer doors.

APPROVED BY _____

DATE _____

Weiland
INFITTING HINGED
TRACK DOOR

WEILAND INC.
55242 HIGHWAY 32
MADISON, NE 68748-6136
(402) 454-2106
www.weilanddoors.com