DCS18
Spec Sheet

Model: DCS 18

Digital Control System and Drive System

Standard Incoming Current: 120 VAC / 1 / 50-60Hz OR 230 VAC / 1 / 50-60Hz

Optional Incoming Current with Transformer: 460-480 / 1 Phase / 50-60Hz

Standard Features:

- UL Listed
- NEMA 4X Enclosure
- 25 inches per second per panel
- Partial open
- Adjustable Speeds
- Time delay close
- Integrated position control system
- Internal diagnostics
- Soft start & stop
- Motor and operator heat
- Surge protection
- 24 VDC Contact
- 120 VAC Contact

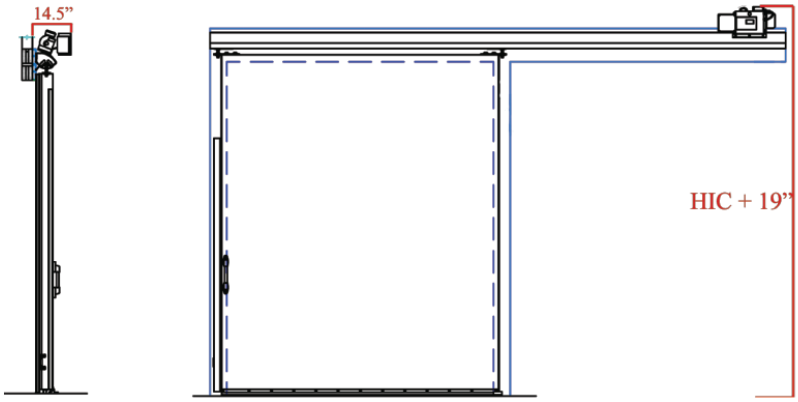

Amp Draw:	Recommended Fuse: 15 Amps
120 VAC	7.6 Amps
208-230 VAC	3.8 Amps
460-480 VAC	2 Amps

Above listed amps are FLA. When idle the operator draws 0.2 amps. Amp draw under normal operations varies based on load.

Motor:	
Type:	Induction
Brand:	Nord Gear
Power:	0.5 HP
Current From Controller:	230 VAC

806 W. S. Airport Road, Norfolk, NE 68701
402-454-2106
info@weilanddoors.com
www.weilanddoors.com

© 2025 Weiland Doors. All rights reserved.
For the most up-to-date product information, visit www.weilanddoors.com.