POWER REQUIREMENTS & SPECS FOR POWER OPERATOR

USED IN WEILAND COLD STORAGE SLIDING DOORS

Model: DCS18

Digital Control System | Drive System

Standard Incoming Current: 120 VAC / 1 / 50-60Hz or 230 VAC / 1 / 50-60Hz

Optional Incoming Current with Transformer: 460-480 / 1 Phase / 50-60Hz

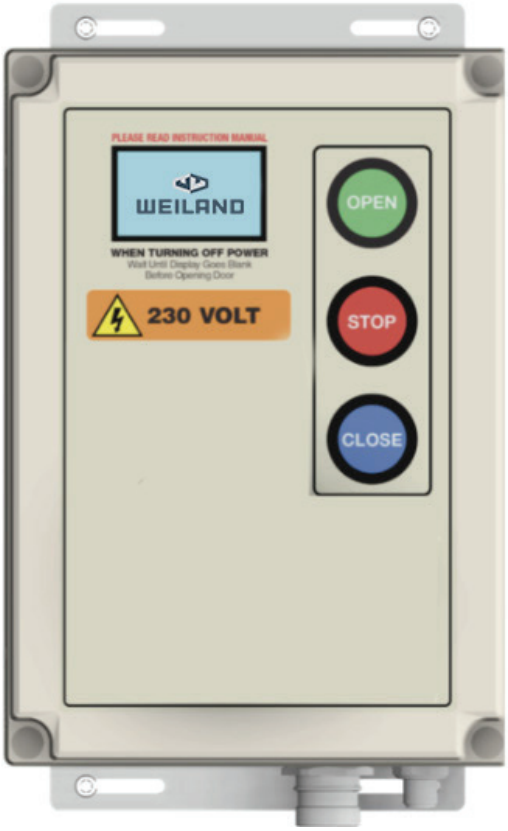

STANDARD FEATURES:

- UL Listed
- NEMA 4X Enclosure
- 25 Inches Per Second (per panel)
- Partial Open
- Adjustable Speeds
- Time Delay Close
- Integrated Position Control System
- Internal Diagnostics
- Soft Start and Stop
- Motor and Operator Heat
- Surge Protection
- 24 VDC Contact
- 120 VAC Contact

AMP DRAW *(RECOMMENDED FUSE 15A):*

120 VAC	7.6 AMPS
208-230 VAC	3.8 AMPS
460-480 VAC	2 AMPS

MOTOR:

Type: Induction
Brand: Nord Gear
Power: 0.5 Horse Power
Current: 230 VAC from Controller

© 2025 Weiland Doors. All rights reserved.
For the most up-to-date product information, visit www.weilanddoors.com.

806 W. S. Airport Road, Norfolk, NE 68701
402-454-2106
info@weilanddoors.com
www.weilanddoors.com