LH/RHR ACTIVE SWING SHOWN – RH/LHR ACTIVE SWING IS MIRROR IMAGE

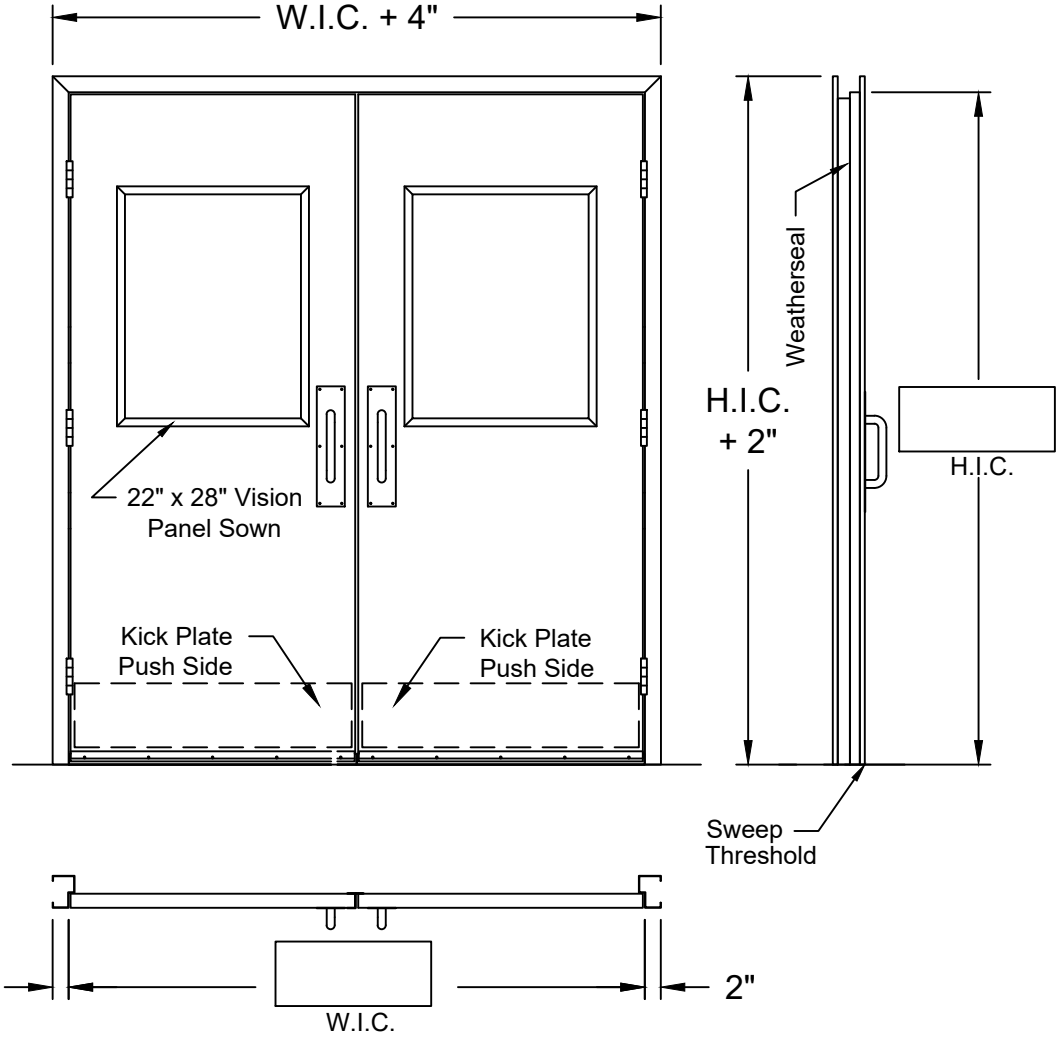


| Opening Name/ Number: | | | |
|---|---|---|---|
| W.I.C. | H.I.C. | Wall Type/ Thickness | Swing |
| | | | |

**Frame Details**

**Frame Type:**
16-GA. SS 304-4 Brushed One Part Frame: ____(Optional) Foamed Standard Frame: ____
16-GA. SS 304-4 Brushed Two-Part Frame ____

**Hinges:**
3 SS Standard Weight 4½" x 4½" Hinges: ____(18-ga SS Door)
4 SS Standard Weight 4½" x 4½" Hinges: ____(16-ga SS Door)

**Gaskets:**
Door Silencers: ____ Self Adhesive Silicone Smoke/Weatherseal: ____
Pro Series SS Adjustable Jamb Mounted Gasket: ____
CS Series Aluminum Adjustable Jamb Mounted Gasket:____

**Door Details**

**Door Panel:**
1-3/4" 16ga Stainless Steel 304-4 Door: ____
1-3/4" 18ga Stainless Steel 304-4 Door: ____

**Closer:**
Pro Series Closer with SS Painted Arm: ____ SS Cover Upgrade: ____
CS Series Closer with Aluminum Painted Steel Arm: ____ SS Cover Upgrade: ____

**Vision Panel:**
SS Vision Panel:
5" x 28": ____ 22" x 28": ____
¼" Abraision Resistant Polycarbonate: ____
1" Clear Tempered Argon Insulated Glass: ____
Safety Film: Yes / No One Side: ____ Both Sides: ____
Stainless Steel Flush 20" x 30" x ⅜" Abraision Resistant Polycarbonate Vision Panel: ____

**Exit/Entry:**
SS Rounded Push/Pull Set: ____
CS Series CYLINDRICAL LEVER: Passage Lever: ____ Lever Lockset: _____
Pro Series SS MORTISE LEVER: Passage Lever: ____ Lever Lockset: _____
Pro Series SS Rim PANIC BAR: Exit Only: ___ Passage Trim: ___ Lever Lockset: _____
CS Series Painted Rim PANIC BAR: Exit Only: ___ Passage Trim: ___ Lockset Trim:_____
Controlled Access Hardware Needed: _____

**Kick Plate:** SS 304-4 Brushed
8" Tall: ____ 12" Tall: ____ 28" Tall: ____ Push Side: ____ Pull Side: ____ Both Sides: ____

**Sweep:**
Pro Series Neoprene Bottom Sweep Gasket with SS Retainer: _____
CS Series Neoprene Bottom Sweep Gasket with Aluminum Retainer:____

**Threshold:**
Pro Series 14-ga Stainless Steel Threshold: ____ HDPE Threshold: ____
CS Series Aluminum Threshold: ____ CS Series Thermally Broken Aluminum Threshold: ___

**Additional Hardware:**
SS Center Astragal: ____ Pro Series EPDM Seal Astragal with SS Retainer: ____
SS Removable Center Mullion: ____ SS Drip Cap: ____ Wall Stop: ____ Floor Stop: ____
SS Top & Bottom Surface Bolts:____ Floor Stop w/ Hold Open:____
Other: _____ **USDA Compliant:** ☑Yes

WEILAND

WEILAND STAINLESS STEEL PERSONNEL DOUBLE DOOR

Customer:

Project Name:

Ship to:

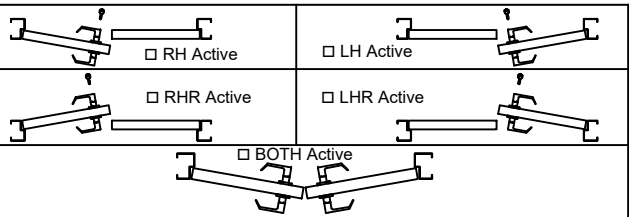


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WEILAND INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WEILAND INC IS PROHIBITED
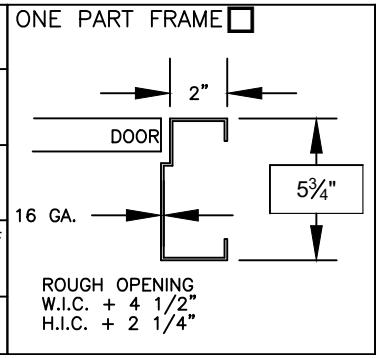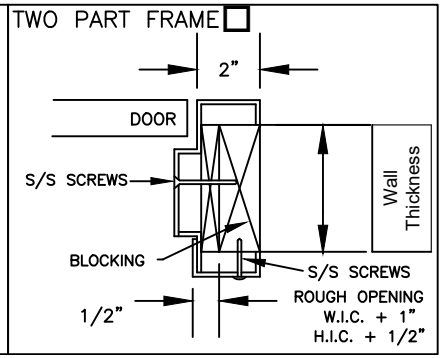
SHOP DRAWINGS NOT APPROVED IN 45 DAYS ARE SUBJECT TO REPRICING & SURCHARGES