LHR ACTIVE SWING SHOWN – RHR ACTIVE IS MIRROR IMAGE

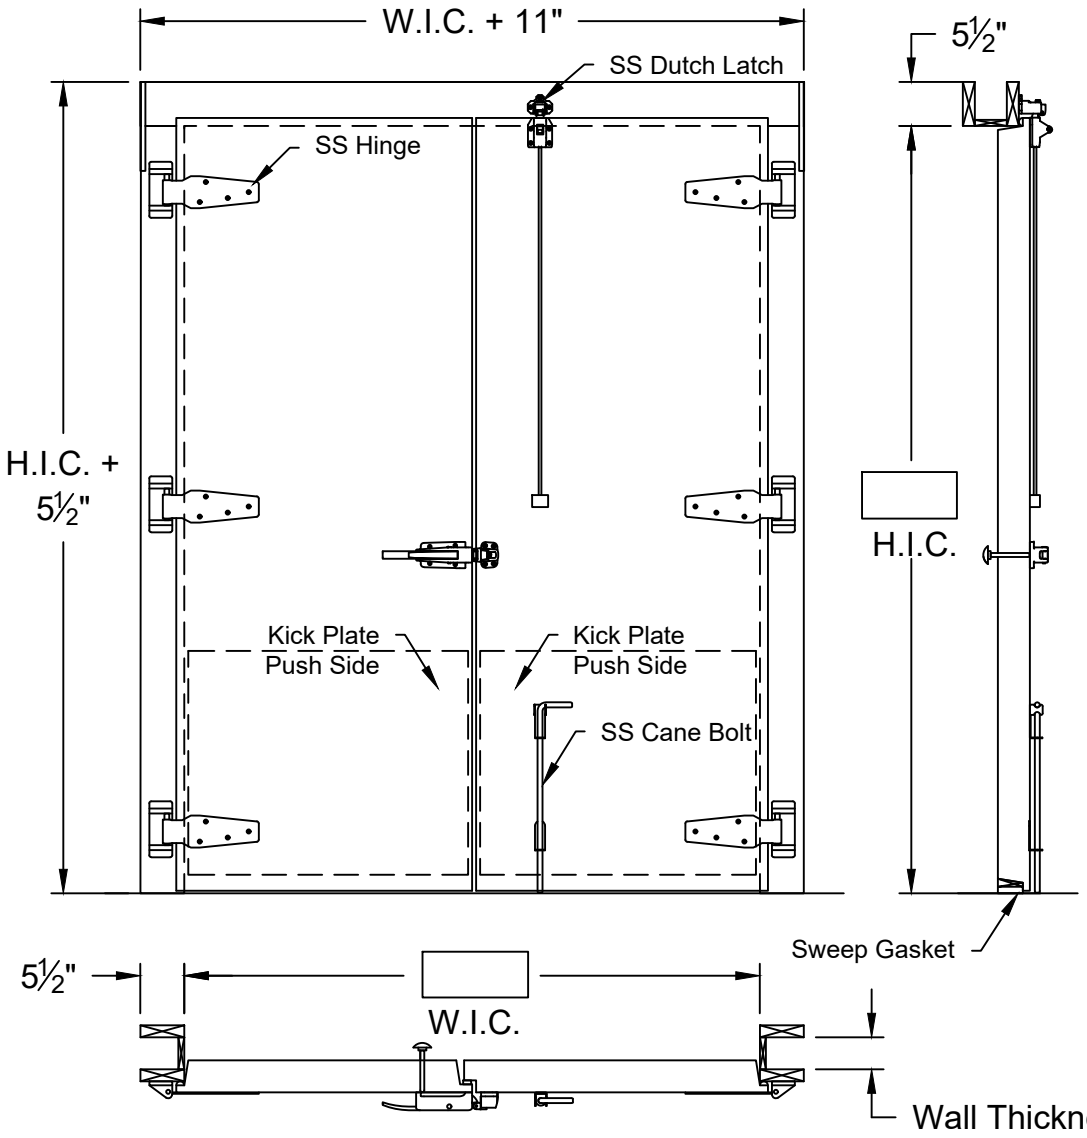

Opening Name/ Number:			
W.I.C.	H.I.C.	Wall Thickness	Swing

Frame Details

Casing Type:
26 Ga White Stucco Embossed Galv.

Sill Type:(SEE BELOW-Lower Right Corner)
Flush Sill: ____ High Sill Step Over: ____ High Sill Step Down: ____
Without Bottom Jamb:___

Door Details
Cooler Door:____ Freezer Door:____

Door Panel:
4" 26 Ga. White Stucco Embossed Galv.: ____ 6" 26 Ga. White Stucco Embossed Galv.: ____

Hinges:
3 Stainless Steel Cam Rise Hinges: ____ 3 Polished Aluminum Cam Rise Hinges: ____
Pilfer Proof Fasteners: ____

Vision Panel:
10" x 10": ____
1" Clear Tempered Insulated Glass, Argon Filled: ____
1" Clear Tempered Insulated Glass, Heated: ____
Safety Film: Yes / No

Exit/Entry:
Pro Series SS Padlockable Latch w/ Inside Safety Release: _____
Stainless Steel Bump Bar: ____
CS Series Chrome Padlockable Latch w/ Inside Safety Release: _____
Stainless Steel Bump Bar: ____

Kick Plate: SS 304-4 Brushed
8" Tall: ____ 12" Tall:____ 28" Tall: ____ Push Side: ____ Pull Side: ____ Both Sides: ____

Closer:
Stainless Steel Barrel Closer: ____ Both Panels:____ Active Panel:____

Additional Hardware:
Cane Bolt: ____ Dutch Latch: ____ SS Drip Cap: ____
¼" Aluminum Thermally Broken Threshold: ____
Other: _____

USDA Compliant: ☑Yes

WEILAND

WEILAND WHITE STUCCO EMBOSSED GALVANIZED DOUBLE INFIT DOOR

Customer:

Project Name:

Ship to:

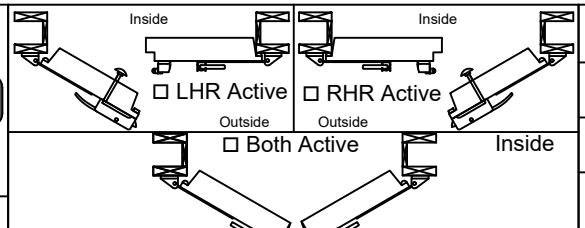

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WEILAND INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WEILAND INC IS PROHIBITED

SHOP DRAWINGS NOT APPROVED IN 45 DAYS ARE SUBJECT TO REPRICING & SURCHARGES

TEMPERATURE	
WARM SIDE	°F
COLD SIDE	°F

Wall Fasteners Available up to 6" Wall Thickness

SS Carriage Bolts ☐ Galvanized Carriage Bolts ☐

Flush Sill ☐



Recommended Rough Opening
W.I.C. + 2-1/2"
H.I.C. + 1-1/4"

High Sill Step Over ☐



Recommended Rough Opening
W.I.C. + 2-1/2"
H.I.C. + 2-1/2"

High Sill Step Down With Bottom Jamb ☐



Recommended Rough Opening With Bottom Jamb
W.I.C. + 2-1/2"
H.I.C. + 2-1/2"

High Sill Step Down Without Bottom Jamb ☐



Recommended Rough Opening Without Bottom Jamb
W.I.C. + 2-1/2"
H.I.C. + 1-1/4"

Optional 2" Tall Bottom Face Casing & Back Trim ☐